

典型性能 Features

- ◆ 20-60 瓦功率输出 (20-60Watts of Output Power)
- ◆ 高隔离耐压 (High isolation voltage)
- ◆ 长期短路保护, 自恢复 (Short Circuit Protection ,Automatic Recovery)
- ◆ 小型化封装 (Small Package)
- ◆ CE、ROHS、中铁认证、EN50155
- ◆ 100%国产化 (100% localization)



电气特性 Electrical Specifications

| 输入特性 Input | Min | Type | Max | Notes |
|-----------------------------------|---|----------|--|--|
| 输入电压范围 | 10V | 24V | 40V | |
| Input Voltage Range | 40V | 74V/110V | 160V | |
| 控制功能 | | ON | | CNT 悬空或接TTL高电平 CNT pin left open or CNT pin connected to TTL logic high |
| ON/OFF Control | | OFF | | CNT 与-Vin 相连 CNT pin is at a logic low |
| 逻辑低 Logic Low | | | 1.2 V | |
| 启动延时时间 Start-up Delay Time | | 10mS | | |
| 输出特性 Output | Min | Type | Max | Notes |
| 输出电压精度 Set point Accuracy | | | ±1% | |
| 负载效应 Load Regulation | | | ±0.5% | |
| 源效应 Line Regulation | | | ±0.2% | |
| 输出电压调节 TRIM Range | | | ±10% | |
| 动态响应 Dynamic Response | | | 4%Vo Pk deviation 400μS settling time | 50~75% load 50~25% load |
| 温度系数 Temperature Regulation | | ±0.2%/°C | | |
| 输出过流保护 Current Limit Threshold | 110% | | 160% | |
| 输出过压保护 Over-voltage Protection | 110% | | 140% | |
| 短路保护 Short-Circuit Protection | 长期短路自恢复 Continuous, Automatic Recovery | | | |
| 综合特性 General | Min | Type | Max | Notes |
| 隔离电压 Isolation Voltage | | 2000Vac | | INPUT TO OUT |

| | | | | |
|-------------------------------------|--|-----------------------|-------|-----------------------|
| 开关频率 Switching Frequency | | 300KHz | | |
| 平均故障间隔时间 MTBF | | 2×10 ⁶ Hrs | | Mil HDBK 217F Tc=25℃ |
| 工作壳温 Case Temperature | -40℃ | | +100℃ | |
| 储存温度 Storage Temperature | -55℃ | | +125℃ | |
| 相对湿度 Relative Humidity | 10% | | 90% | |
| 管脚焊接温度 Pin Solder Temperature | | | 250℃ | Wave Solder <10S |
| 手工焊接时间 Hand Soldering Time | | | 5S | Iron Temperature 425℃ |
| 传导 Conducted Emission | GB9254/CISPR22/EN55022 Class A (推荐电路见图) | | | |
| 静电放电 Electrostatic Discharge | GB17626/EN61000-4-2 空气放电±8KV, 接触放电±6KV | | | |
| 浪涌抗扰度 Surge Immunity | GB17626/EN61000-4-5 ±2KV (推荐电路见图) perf. Criteria A | | | |
| 脉冲群抗扰度 Electrical Fast Transient | GB17626/EN61000-4-4 ±2KV (推荐电路见图) perf. Criteria A | | | |

产品型号列表


| 型号 Models | 输入电压范围 Input Voltage Range | 输出电压 (Vdc) Output Voltage | 输出电流 (A) Output current | 纹波噪声(mv) Ripple and noise | 典型效率 Efficiency | 容性负载(μF) Max.Capacitor Load |
|---------------|-------------------------------|------------------------------|----------------------------|------------------------------|--------------------|--------------------------------|
| CRS20-24S3V3 | 10-40V | 3.3 | 5.0 | 50 | 86% | 1000 |
| CRS20-24S5 | 10-40V | 5.05 | 4.0 | 50 | 88% | 1000 |
| CRS20-24S12 | 10-40V | 12 | 1.66 | 100 | 88% | 680 |
| CRS20-24S15 | 10-40V | 15 | 1.4 | 100 | 88% | 680 |
| CRS20-24S24 | 10-40V | 24 | 0.83 | 100 | 88% | 470 |
| CRS20-24S48 | 10-40V | 48 | 0.41 | 300 | 88% | 220 |
| CRS20-110S3V3 | 40-160V | 3.3 | 5.0 | 50 | 88% | 1000 |
| CRS20-110S5 | 40-160V | 5.05 | 4.0 | 50 | 88% | 1000 |
| CRS20-110S12 | 40-160V | 12 | 1.66 | 100 | 89% | 680 |
| CRS20-110S15 | 40-160V | 15 | 1.4 | 100 | 89% | 680 |
| CRS20-110S24 | 40-160V | 24 | 0.83 | 100 | 88% | 470 |
| CRS20-110S48 | 40-160V | 48 | 0.41 | 300 | 88% | 220 |

| | | | | | | |
|---------------|---------|------|-------|-----|-----|------|
| CRS30-24S3V3 | 10-40V | 3.3 | 6.0 | 50 | 86% | 6800 |
| CRS30-24S5 | 10-40V | 5.05 | 6.0 | 50 | 88% | 6800 |
| CRS30-24S12 | 10-40V | 12 | 2.5 | 100 | 88% | 680 |
| CRS30-24S15 | 10-40V | 15 | 2.0 | 100 | 88% | 680 |
| CRS30-24S24 | 10-40V | 24 | 1.25 | 100 | 88% | 470 |
| CRS30-24S48 | 10-40V | 48 | 0.625 | 300 | 88% | 220 |
| CRS30-110S3V3 | 40-160V | 3.3 | 6.0 | 50 | 88% | 6800 |
| CRS30-110S5 | 40-160V | 5.05 | 6.0 | 50 | 88% | 6800 |
| CRS30-110S12 | 40-160V | 12 | 2.5 | 100 | 89% | 680 |
| CRS30-110S15 | 40-160V | 15 | 2.0 | 100 | 89% | 680 |
| CRS30-110S24 | 40-160V | 24 | 1.25 | 100 | 88% | 470 |
| CRS30-110S48 | 40-160V | 48 | 0.625 | 300 | 88% | 220 |
| CRS40-24S3V3 | 10-40V | 3.3 | 8.0 | 50 | 86% | 6800 |
| CRS40-24S5 | 10-40V | 5.05 | 8.0 | 50 | 88% | 6800 |
| CRS40-24S9 | 10-40V | 9 | 4.44 | 100 | 88% | 680 |
| CRS40-24S12 | 10-40V | 12 | 3.33 | 100 | 88% | 680 |
| CRS40-24S15 | 10-40V | 15 | 2.66 | 100 | 88% | 680 |
| CRS40-24S24 | 10-40V | 24 | 1.66 | 100 | 88% | 470 |
| CRS40-24S48 | 10-40V | 48 | 0.83 | 300 | 88% | 220 |
| CRS40-110S3V3 | 40-160V | 3.3 | 8.0 | 50 | 88% | 6800 |
| CRS40-110S5 | 40-160V | 5.05 | 8.0 | 50 | 88% | 6800 |
| CRS40-110S12 | 40-160V | 12 | 3.33 | 100 | 89% | 680 |
| CRS40-110S15 | 40-160V | 15 | 2.66 | 100 | 89% | 680 |
| CRS40-110S24 | 40-160V | 24 | 1.66 | 100 | 88% | 470 |
| CRS40-110S48 | 40-160V | 48 | 0.83 | 300 | 88% | 220 |
| CRS50-24S3V3 | 10-40V | 3.3 | 10 | 50 | 86% | 6800 |
| CRS50-24S5 | 10-40V | 5.05 | 10 | 50 | 88% | 6800 |
| CRS50-24S15 | 10-40V | 15 | 3.33 | 100 | 88% | 680 |
| CRS50-24S24 | 10-40V | 24 | 2.08 | 100 | 88% | 470 |
| CRS50-24S48 | 10-40V | 48 | 1.04 | 300 | 88% | 220 |


| | | | | | | |
|---------------|---------|------|------|-----|-----|------|
| CRS50-110S3V3 | 40-160V | 3.3 | 10 | 50 | 88% | 6800 |
| CRS50-110S5 | 40-160V | 5.05 | 10 | 50 | 88% | 6800 |
| CRS50-110S12 | 40-160V | 12 | 4.16 | 100 | 89% | 680 |
| CRS50-110S15 | 40-160V | 15 | 3.33 | 100 | 89% | 680 |
| CRS50-110S24 | 40-160V | 24 | 2.08 | 100 | 88% | 470 |
| CRS50-110S48 | 40-160V | 48 | 1.04 | 300 | 88% | 220 |
| CRS60-24S3V3 | 10-40V | 3.3 | 12 | 50 | 86% | 6800 |
| CRS60-24S5 | 10-40V | 5.05 | 12 | 50 | 88% | 6800 |
| CRS60-24S12 | 10-40V | 12 | 5.0 | 100 | 88% | 680 |
| CRS60-24S15 | 10-40V | 15 | 4.0 | 100 | 88% | 680 |
| CRS60-24S24 | 10-40V | 24 | 2.5 | 100 | 88% | 470 |
| CRS60-24S48 | 10-40V | 48 | 1.25 | 300 | 88% | 220 |

■说明：仅列出典型型号，其它型号，请确定功率，输入电压及输出电压，致电我公司。
尾缀带 H 的产品标配散热器

电磁兼容应用 (EMC)

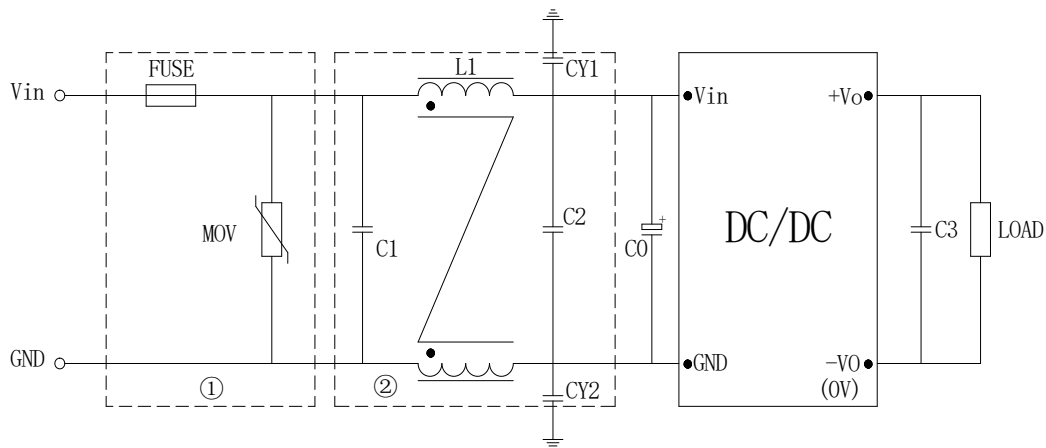

| 型号 | Vin: 24V | Vin: 110V |
|---------|----------------|------------|
| FUSE | 根据具体电源模块型号电流选择 | |
| MOV | 14D101K | 14D101K |
| C0 | 220μF/50V | 100μF/100V |
| C1、C2 | 4.7μF/50V | 2.2μF/100V |
| C3 | 100μF | |
| LCM | 1mH | |
| CY1、CY2 | 2.2nF Y2 安规电容 | |

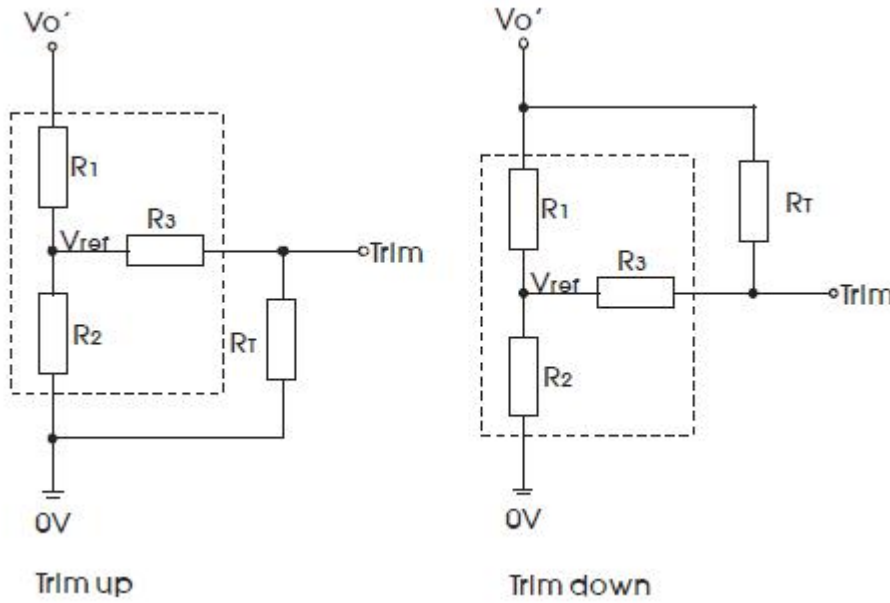输出调节应用 (TRIM Function)


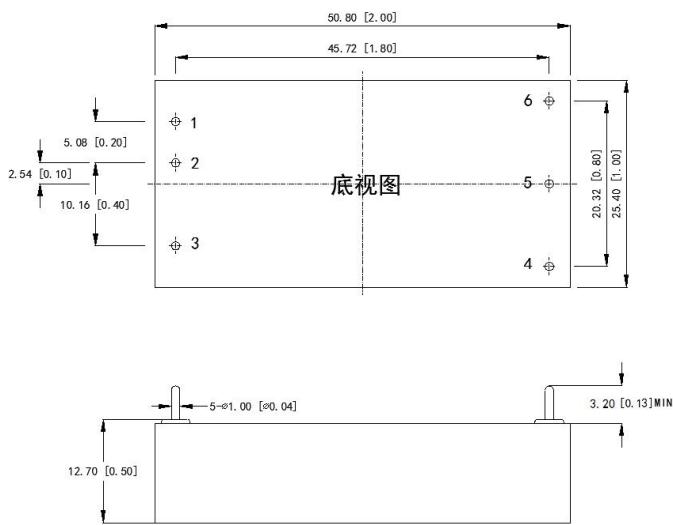
$$up : R_T = \frac{TR_2}{R_2 - T} - R_3 \quad T = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1 \text{ (调高电压)}$$

$$down : R_T = \frac{TR_1}{R_1 - T} - R_3 \quad T = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2 \text{ (调低电压)}$$


| Vout (V) | R1(KΩ) | R2(KΩ) | R3(KΩ) | Vref(V) |
|----------|--------|--------|--------|---------|
| 3.3 | 3.32 | 2.0 | 8.2 | 1.24 |
| 5 | 2.55 | 2.49 | 8.2 | 2.5 |
| 9 | 6.49 | 2.49 | 10 | 2.5 |
| 12 | 9.53 | 2.49 | 12 | 2.5 |
| 15 | 12.5 | 2.49 | 15 | 2.5 |
| 24 | 21.5 | 2.49 | 20 | 2.5 |
| 48 | 45.3 | 2.49 | 22 | 2.5 |

机械图及管脚说明 (Mechanical Chart、Pins) (Unit: mm/inch)

普通尺寸图



加散热片尾缀 H 尺寸图

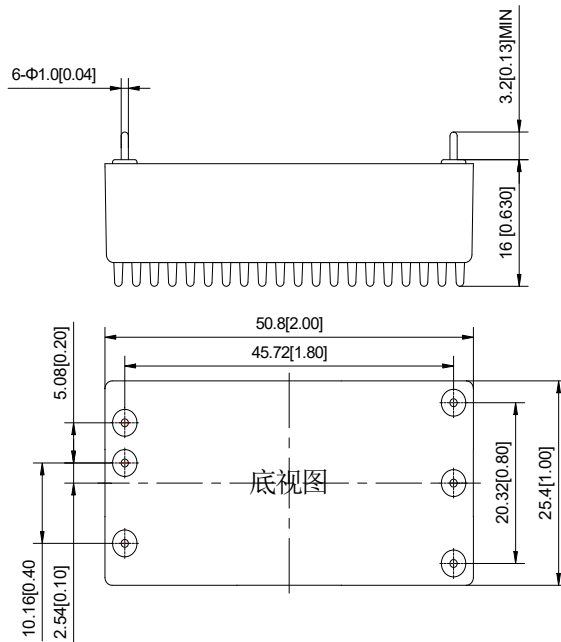

| 管脚 Pin | 1 | 2 | 3 | 4 | 5 | 6 |
|-------------|------|------|-----|------|-----|-----|
| 功能 Function | +Vin | -Vin | CNT | TRIM | -Vo | +Vo |

注:安装定位尺寸公差按 GB/T1804-2000 F 级标准、外型尺寸公差按 GB/T1804-2000 C 级标准。